



SPCHKIT

Includes: 2 SP323, 2 SP670 and A931 case

SP323 Clamp Type Temperature Probe

Features:

- Temperature Range: -40 to +185 °F (-40 to +85 °C)
- Clamp Range: 1/4 inch to 1 1/2 inch (6mm to 38mm)
- Connect to Smart Device and use with the TPI View App
- Temperature measurement on air conditioning, heating, and refrigeration systems
- View "LIVE" Temperature Readings and instantly Save, e-mail and/or Print them
- Save, e-mail and/or Print "Differential" Temperature readings with one or two SP323 probes
- Perform, Save, e-mail and/or Print differential temperature readings such as Radiator Balancing or Flow & Return on Boilers or Heat Pumps
- Remote Data Logging Function with Multiple instruments logging at the same time
- Store ALL GPS tagged Test Results within the TPI View Job Management
- Use in conjunction with the SP670 high pressure smart probe to perform Superheat and Subcooling measurements

SP670 High Pressure Probe

Features:

- Pressure Range: -14.7 psi to 870 psi (-1 bar to 60 bar)
- Connection Type: 7/16"-20 UNF / 1/4" SAE angled for connections in tight spaces
- Over pressure protected to 1000 psi
- Adjustable Schrader valve depressor for use on worn valves
- Replaceable Schrader valve depressor
- View "LIVE" High Pressure readings
- Save, e-mail and/or Print Pressure readings with GPS tagged Date & Time on Report
- Ideal for checking for compressor leaks
- Store ALL GPS tagged Test Results within the TPI View Job Management
- Use in conjunction with the SP323 temperature clamp smart probe to perform Superheat and Subcooling measurements

Kit



FCC ID: Q0QBGM113
IC (Industry Canada) ID: 5123A-BGM113



CE UK CA

R 209-J00204



TPI View App

powerful App to use with TPI Smart Probes for HVAC applications.

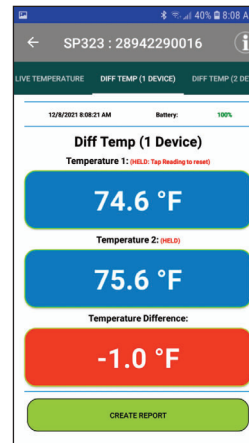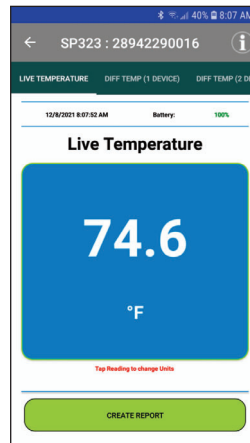


Scan the code, get the FREE App





SP323 Clamp Type Temperature Probe

Temperature Range	-40°F to 185°F (-40°C to 85°C)
Clamp Pipe Size	1/4 inch to 1 1/2 inch (6mm to 38mm)
Resolution	0.1°F / 0.1°C
Accuracy	32°F to 185°F (0°C to 85°C) = +/- 0.9°F (+/- 0.5°C) <32°F (<0°C) = +/-1.8°F (+/-1.0°C)
Data Logging	10,000 readings in 1 sec to 59 min 59 sec intervals
Battery Life	Approximately 170 hours
Battery Type	AAA x 3 alkaline
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Storage Temperature	About 170 hour.
Humidity	0 ~ 80 %RH
Weight	5.64oz (160g)
Bluetooth	5.0 (350 foot range depending on obstacles)

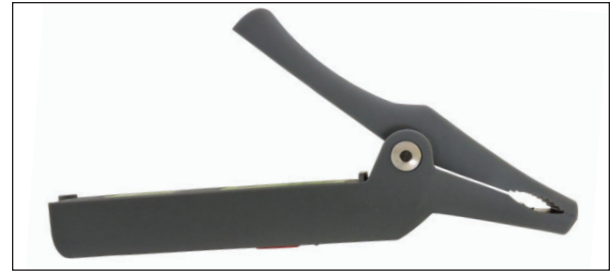

SP670 High Pressure Probe

Pressure Range	-14.7 psi to 870 psi (-1 bar to 60 bar)
Over Pressure Range	1000 psi (70 bar)
Input Connection	7/16"-20 UNF / 1/4" SAE
Resolution	0.1 psi / 0.01 bar
Accuracy	+/- 0.5% of full scale
Battery Life	Approximately 160 hours
Battery Type	AAA x 3 alkaline
Operating Temperature	32 °F to 122 °F (0 °C to 50 °C)
Storage Temperature	-4 °F to 140 °F (-20 °C to 60 °C)
Humidity	0 to 80 %RH
Weight	5.64oz (160g)
Bluetooth	5.0 (350 foot range depending on obstacles)

